




PLDR28 EMERGENCY

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
PLDR28/3K/EM	2150	1855	17	3000K	110°	on-off
PLDR28/4K/EM	2400	2070	17	4000K	110°	on-off

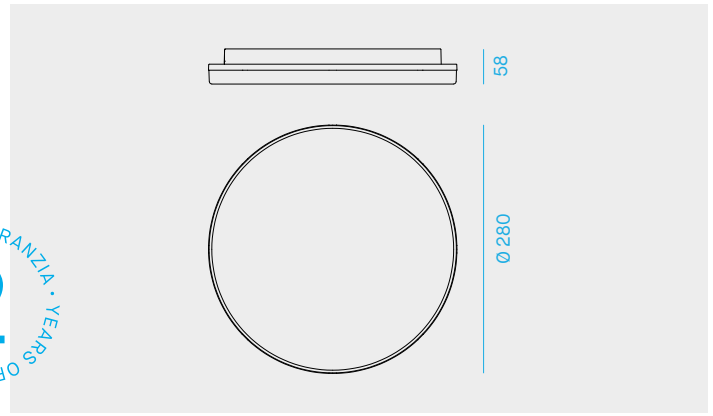

2 ANNI DI GARANZIA • YEARS OF WARRANTY



Plafoniera LED tonda per installazione a plafone e a parete.

Round LED fitting for ceiling and wall-mounted installation.

Luminaire LED rond pour installation au plafond et au mur.

Runde LED-Fassung für Decken- und Wandmontage.

LED 2835

2835 LED.

LED 2835

2835 LED.

Lifetime 30.000h (rendimento 70%).

Lifetime 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000Std. (Lichtstrom 70%).

Corpo in policarbonato bianco e diffusore opale.

White polycarbonate body, opal diffuser.

Corps en polycarbonate blanc et diffuseur opale.

Weisses PC-Gehäuse, opaker Diffusor.

Kit emergenza integrato. Durata 3 ore. Potenza e flusso luminoso al 10%. Pulsante test integrato. Fusibile di protezione contro le sovratensioni.

Integrated emergency kit. 3 hours. 10% power and luminous flux. Integrated test button. Surge protection fuse.

Kit secours 3 heures intégré. 10% puissance et flux lumineux. Bouton test intégré. Fusible de protection de surtension.


Eingebautes Notfall-Kit. 3Std. 10% Strom und Lichtfluss. Integrierter Testknopf. Überspannungsschutzgerät.

Alimentatore 220-240V - 50/60Hz incluso.


220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.


Netzgerät 220-240V - 50/60Hz enthalten.

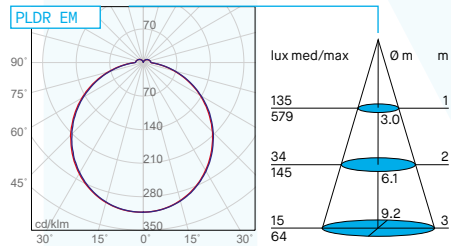

Fotometria a regime
Steady-state photometry:
17.5W - 1855lm

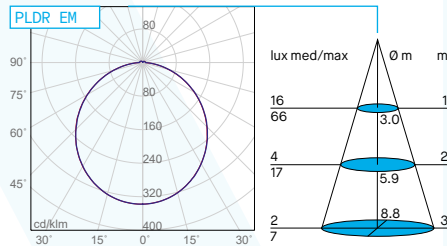

Fotometria in emergenza
Photometry in emergency-state:
1.6W - 196lm

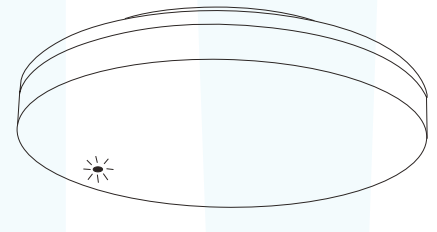

LED spia presenza rete e ricarica della batteria.

-
Indicator LED for the presence of power status and charge of battery.