


RF3320100

BLACK PLUG KIT AND DRIVER



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.

For the installation of the spare-part, it is necessary to consult a qualified electrician.

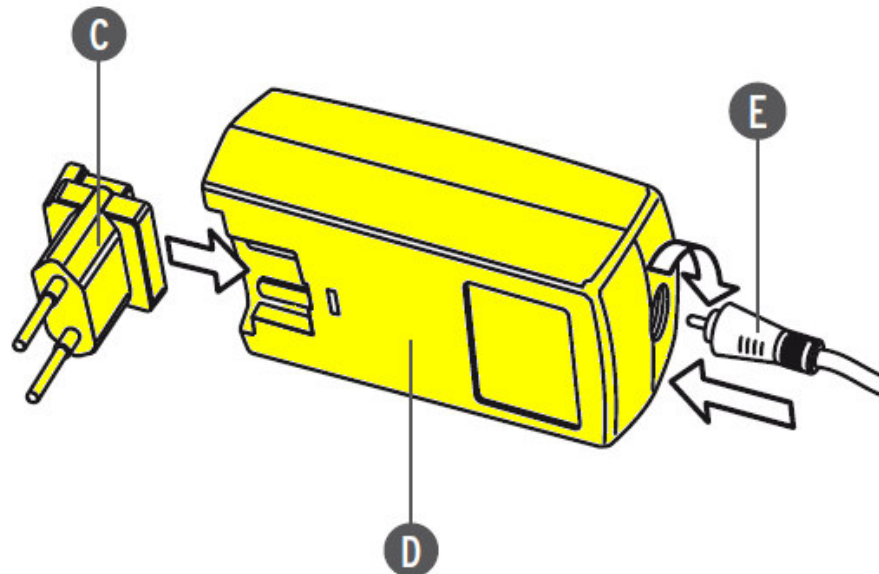

Insert the plug (C) into the driver unit (D). By using the guides snap it inside its apposite slot (use the correct type of plug for the area in which the device must be installed), connect the plug (E) to the feeder unit locking it in by rotating it 90° clockwise.

TECHNICAL DATA SHEET

Main Export Markets:

- ❖ Eastern Europe
- ❖ North America
- ❖ Mid East/Africa
- ❖ Central/South America
- ❖ Asia
- ❖ Western Europe
- ❖ Australia/Asia

Specific technical data:

- Input voltage: 100-240V AC
- Input current: 400mA
- Frequency: 50-60Hz
- Efficiency: 60% typ. at full capacity
- Output voltage tolerance: +/- 5%
- Low standby power: 0.3W max.
- Operation temp.: 0 to 40 degrees Celsius at maximum capacity
- Storage temp.: -20 to 60 degrees Celsius
- Humidity: 5% to 95% non condensing

Safety approval:

- cULus(UL60950,UL2601,CSA60950 &CSA601)
- TUV-GS
- CE Mark
- PSE-JET
- C-Tick(AS/NZS60950)
- CCC(GB4943)