


### 80322/RGBW

Code	Nominal lm/m	Real lm/m	W/1m	CCT	CRI	cut mm
<b>80322/RGBW</b>	1380	937	13.5	RGB+3000K	>90	100

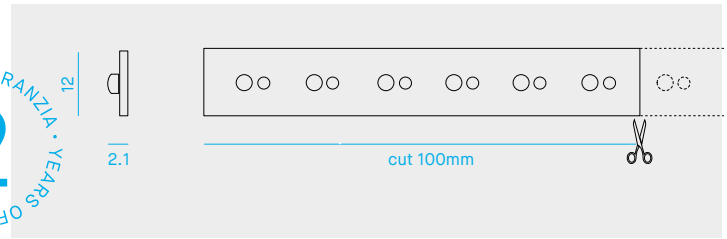

Striscia LED RGB+W (3000K) da interno di 5 metri.

LED 5050+3528, montato su nastro flessibile autoadesivo 3M.  
60+60 LED/m - 300+300 LED/5m

Life time 50.000h

È possibile tagliare o piegare il nastro ogni 100mm  
Lunghezza massima consentita del nastro è 5 metri.

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente.

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.

RGB+W (3000K) LED strip for indoor use of 5m.

5050+3528 LED, assembled on flexible 3M sticky tape.  
60+60 LED/m - 300+300 LEDs/5m

Life time 50.000h

Possible flexible and cut points every 100mm  
Maximum length allowed for the tape is 5m.

Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.

In case more LED strips have to be connected to one power supply, connect them in parallel.

Bandeau LED RGB+W (3000K) pour l'intérieur de 5 mètres.

LED 5050+3528, réalisé sur circuit flexible autocollant 3M.  
60+60 LED/m - 300+300 LED/5m

Durée de vie 50.000h

Le bandeau peut être coupé ou plié tous les 100mm  
Longueur maximum pour le circuit flexible 5 mètres.

Profils en aluminium appropriés pour une dissipation adéquate, à commander séparément

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation

RGB+W (3000K) LED Lichtband für innen von 5 Meter.


LED 5050+3528, 3M auf einem flexiblen Klebeband.  
60+60 LED/m - 300+300 LED/5m

Lebensdauer 50.000h

Alle 100mm schneid- oder biegsam.  
Maximal zulässige Länge des Bandes beträgt 5 Meter.

Aluminiumprofile geeignet für ausreichende Ableitung, separat zu bestellen

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden

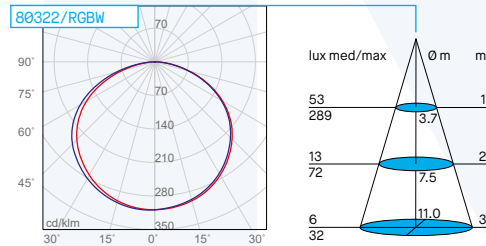

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

Code	IP20	W	max m	Code	IP20	W	max m	Code	IP67	W	max m	Code	IP67	W	max m
5855		20	1.0	5801 (PUSH/DIM1-10V)		100	6.0	5788		25	1.5	5784		100	6.0
5674		70	4.0					5789		40	2.5	5672		150	9.0
5678		75	4.5					5782		60	3.5	5676		150	9.0
5677		120	7.5					5673		70	4.0	5785		240	14.5
5675		150	9.0					5783		75	4.5	5786		320	20.0

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Unità di gestione da ordinare separatamente – Control units to be ordered separately

Code	Descrizione	Description
<b>5834/B</b>	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Bluetooth control unit
<b>5930/RGBW</b>	Centralina RGBW con telecomando	RGBW Control unit with remote controller
<b>5940/U</b>	Centralina RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming control unit
<b>5941/C</b>	Telecomando a 4 zone per centralina 5940/U	Remote controller 4 zones for 5940/U control unit
<b>5942/T</b>	Pannello touch da parete a 4 zone per centralina 5940/U	Wall touch panel 4 zones for 5940/U control unit

Per ulteriori unità di gestione, vedi catalogo Lineare - For further control units, see Linear catalogue

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente  
Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.

## 2m da superficie, parete e plafone - wall and ceiling surface-mounted of 2m

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
<b>BARRA/STRIP/3</b>	<b>BARRA/STRIP/3/S</b>	<b>BARRA/STRIP/3/A</b>
<b>BARRA/STRIP/3E</b>	<b>BARRA/STRIP/3E/S</b>	<b>BARRA/STRIP/3E/A</b>
<b>BARRA/STRIP/7</b>	Lens	Lens
<b>BARRA/STRIP/10</b>	<b>BARRA/STRIP/10/S</b>	<b>BARRA/STRIP/10/A</b>
<b>BARRA/STRIP/14</b>	Lens	Lens
<b>BARRA/STRIP/19</b>	<b>BARRA/STRIP/19/S</b>	<b>BARRA/STRIP/19/A</b>

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
<b>PA/01</b>	<b>PA/01/S</b>	--
--	<b>PA/02/S</b>	--
<b>PA/03</b>	<b>PA/03/S</b>	--
<b>PA/04</b>	<b>PA/04/S</b>	--
<b>PA/06</b>	<b>PA/06/S</b>	--

## 2m da incasso - recessed-mounted 2m

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
<b>BARRA/STRIP/4</b>	<b>BARRA/STRIP/4/S</b>	<b>BARRA/STRIP/4/A</b>
<b>BARRA/STRIP/5</b>	<b>BARRA/STRIP/5/S</b>	<b>BARRA/STRIP/5/A</b>
<b>BARRA/STRIP/9</b>	<b>BARRA/STRIP/9/S</b>	<b>BARRA/STRIP/9/A</b>
<b>BARRA/STRIP/15</b>	<b>BARRA/STRIP/15/S</b>	--

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
<b>BARRA/STRIP/16</b>	<b>BARRA/STRIP/16/S</b>	<b>BARRA/STRIP/16/A</b>
<b>BARRA/STRIP/17</b>	<b>BARRA/STRIP/17/S</b>	<b>BARRA/STRIP/17/A</b>
<b>PA/05</b>	<b>PA/05/S</b>	--
<b>PA/07</b>	<b>PA/07/S</b>	--

## 2m angolare - angled 2m

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
<b>BARRA/STRIP/6</b>	<b>BARRA/STRIP/6/S</b>	<b>BARRA/STRIP/6/A</b>
<b>BARRA/STRIP/8</b>	<b>BARRA/STRIP/8/S</b>	<b>BARRA/STRIP/8/A</b>
<b>BARRA/STRIP/11</b>	<b>BARRA/STRIP/11/S</b>	<b>BARRA/STRIP/11/A</b>

Code		
Trasparente/Transparent	Opale/Opa1	Acidato/Acid-etched
<b>BARRA/STRIP/12</b>	<b>BARRA/STRIP/12/S</b>	<b>BARRA/STRIP/12/A</b>
<b>BARRA/STRIP/22</b>	<b>BARRA/STRIP/22/S</b>	<b>BARRA/STRIP/22/A</b>