


ICE30

| Code | Nominal/lm | Real/lm | System/W | CCT |
|----------------|------------|---------|----------|-------|
| IC30/3K | 1350 | 851 | 12 | 3000K |
| IC30/4K | 1550 | 977 | 12 | 4000K |

2 ANNI DI GARANZIA
2 YEARS OF GUARANTEE

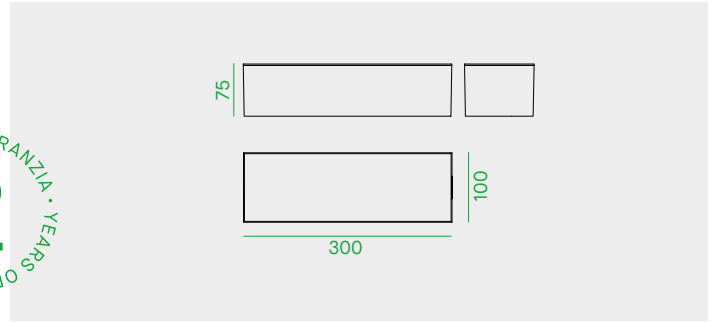

| | | | | |
|---------|-----------|------|----|---|
| CRI >80 | V 220-240 | IP65 | CE | □ |
|---------|-----------|------|----|---|

Mind in Italy

Applique LED quadrata o rettangolare IP65 per installazione a parete o a plafone.

IP65 square or rectangular LED luminaire for wall-mounted or ceiling installation.

Applique LED carré ou rectangulaire IP65 pour installation murale ou au plafond.

IP65 quadratische oder rechteckige LED-Leuchte für Wand- oder Decken-Installation

LED 2835

2835 LED.

LED 2835.

2835 LED.

Lifetime 30.000h (rendimento 70%).

Lifetime 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

Corpo in policarbonato bianco e diffusore opale.

White polycarbonate body, opal diffuser.

Corps en polycarbonate blanc, diffuseur opale.


Weisser PC-Körper, opaker Diffusor

Scheda LED a tensione di rete 220-240V

220-240V LED board.

LED en tension 220-240V.

LED, Netzspannung 220-240V.



IC30/3K

