


Stile next 503

LL641D3


LOMBARDO



Technical information:

Installation:	Post, Wall, Wall recess, Ceiling recess, Ceiling
Material:	Aluminium
Diffuser type:	Serigraphed glass
Lamp type:	LED
Colour temperature:	3000K, lm -5%
CRI:	>80
Photobiological risk:	RG0
Power consumption (Watt):	6
Lumen:	720
Real Lumen:	170
Power supply:	✓ integrated
LED:	220-240 V
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK ENEC

Possible choice of serigraphed glass in 3 different colours: black – HT grey – corten. Single cable entry at the back.



Stile next 503

LL641D3

LOMBARDO




Stile next 503

LL641D3

LOMBARDO




Lighting simulation:

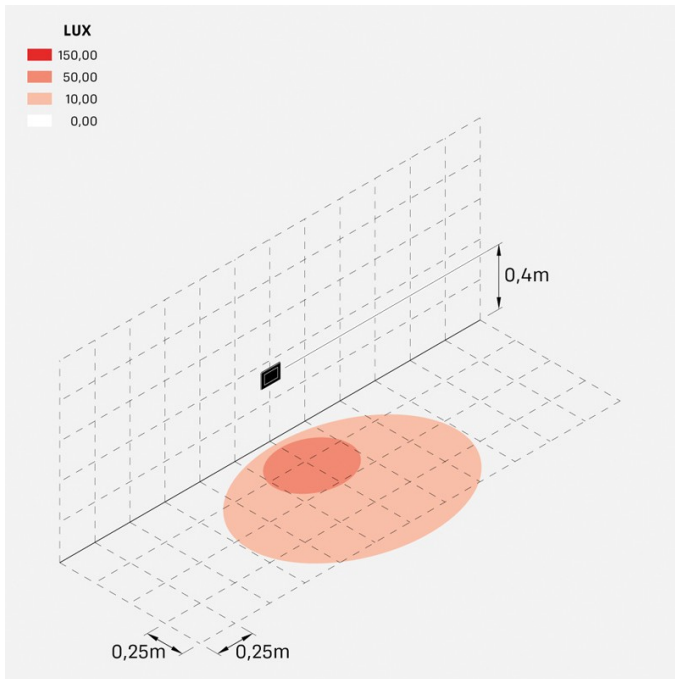

stile_next_503_6w

Photometric curves:

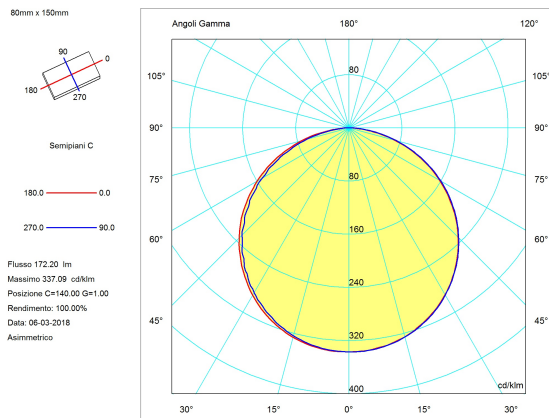

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - F 0039 035 939 496 - E info@lombardo.it

lombardo.it